

## High Surge Protection Devices

### SN Series (Super High Network, 1206 & 1210 Size)

#### Features:

- Bidirectional and symmetrical V/I characteristics
- Meet IEC61000-4-5/K21 standard
- Large withstanding surge voltage capability: 4~6kV (@10/700μs)
- Excellent low leakage current <10μA
- Multilayer construction provides higher power dissipation

#### Applications:

- Telecom equipment RJ45, LAN connector, Ethernet
- Outdoor/Indoor AP/IAD
- Security system IP CAM
- Low voltage power line DC12V, AC24V, PoE
- ADSL/XDSL telecom equipment
- VOIP phones
- PoE modules
- HUB switch
- Other Networks

#### Shape and Dimensions:

Unit (mm)	1206	1210
L	3.2 +0.6/-0.2	3.2 +0.6/-0.2
W	1.6 +0.4/-0.2	2.5 +0.4/-0.2
T	1.90 Max.	2.60 Max.
b	0.5 ± 0.20	0.5 ± 0.25

#### Packaging:

Chip Size	Parts on 7 inch (178 mm) Reel
1206	2,000
1210	1,500

#### Product Identification:

**HSP 1206 SN 012V 4000**

(1) (2) (3) (4) (5)


(1) **Series Code:** High Surge Protection Series

(2) **Size Code:** L x W (inch), the first two digits - L (length), the last two digits - W (width)

(3) **Characteristic Code:** SN - Super High Network

(4) **Breakdown Voltage Code:** 012V - 12V

(5) **Surge Voltage Code:** 4000 - 4000V

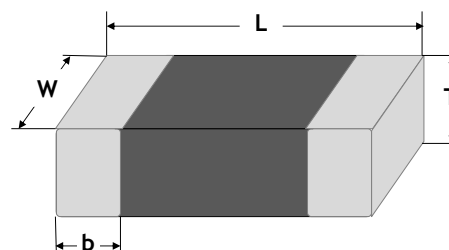

#### Surge Waveform:

Severity Level	t1 (=1.67t'1)	t2
1	10 μs	700 μs




Fig. 1 CCITT 7 10/700 μs surge definition

## High Surge Protection Devices

SN Series (Super High Network, 1206 & 1210 Size)

### Ordering Information:

Part Number	Size	Working Voltage		Breakdown Voltage @1mA (V) <sup>1</sup>	Clamping Voltage (V) <sup>2</sup>	Surge Current @ 8/20μs (A) <sup>3</sup>	Surge Voltage (kV)
		V AC	V DC				
HSP1206SN012V4000	1206	6	9	12 (12~20)	< 30	100	4
HSP1206SN012V6000	1206	6	9	12 (12~20)	< 30	150	6
HSP1210SN047V4000	1210	30	38	47 (±10%)	< 75	100	4
HSP1210SN047V6000	1210	30	38	47 (±10%)	<75	150	6
HSP1210SN075V6000	1210	48	60	75 (±10%)	< 100	150	6

<sup>1</sup> The breakdown voltage was measured at 1 mA current.

<sup>2</sup> The clamping voltage was measured at standard current 1206(1A) and 1210 (2.5A).

<sup>3</sup> The surge current was tested at 10/700 μs waveform, Ri=40Ω. Common-mode testing is to test all data lines while the GND.

Part Number	Non-linear Coefficient (α)	Leakage Current (μA)		Capacitance <sup>4</sup> @ 1kHz (pF)	Response Time (T <sub>rise</sub> )	Operating Temperature (°C)	Storage Temperature (°C)
		Before Surge Test	After Surge Test				
HSP1206SN012V4000	20	10	80	3200	< 1ns	-55 to +125	-55~+150
HSP1206SN012V6000	20	10	80	3850			
HSP1210SN047V4000	30	10	80	1400			
HSP1210SN047V6000	30	10	80	1670			
HSP1210SN075V6000	30	10	80	1300			

<sup>4</sup> The capacitance value only for customer reference, it's not formal specification.

## Disclaimer

*Specifications are subject to change without notice. AEM products are designed for specific applications and should not be used for any purpose (including, without limitation, automotive, aerospace, medical, life-saving applications, or any other application which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property) not expressly set forth in applicable AEM product documentation. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Warranties granted by AEM shall be deemed void for products used for any purpose not expressly set forth in applicable AEM product documentation. AEM shall not be liable for any claims or damages arising out of products used in applications not expressly intended by AEM as set forth in applicable AEM product documentation. The sale and use of AEM products is subject to AEM terms and conditions of sale. Please refer to AEM's website for updated catalog and terms and conditions of sale.*



### **AEM Components (Suzhou) Co., Ltd**

**461 Zhongnan Street,  
China-Singapore Suzhou Industrial Park  
Jiangsu, P. R. China, 215026**

Tel: 86-512-6258-0028

Fax: 86-512-6258-0018

Email: [marketing@aemchina.com](mailto:marketing@aemchina.com)

### **AEM Components (USA), Inc.**

**6670 Cobra Way, San Diego, CA 92121, USA**

Tel: 1-858-750-6100

Fax: 1-858-481-1123

Email: [sales@aemcomponents.com](mailto:sales@aemcomponents.com)